

Trusted. Tested. Tough.®

SECTION: Z3.20.120

ZM1795

0519

Supersedes

1017

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.




MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347  
 SHIPTO: 3649 Cane Run Road • Louisville, KY 40211-1961  
 (502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:  
[zoellerengineered.com](http://zoellerengineered.com)



**HAZARDOUS LOCATION SERIES**  
 CLASS I, DIVISION 1, GROUPS C & D  
 CLASS I, ZONE 1, GROUPS IIA & IIB  
 PERFORMANCE DATA  
 Commercial Duty Sewage  
 2" (50 mm) Spherical Solid Passing Capacity  
 2" & 3" Vertical Discharge

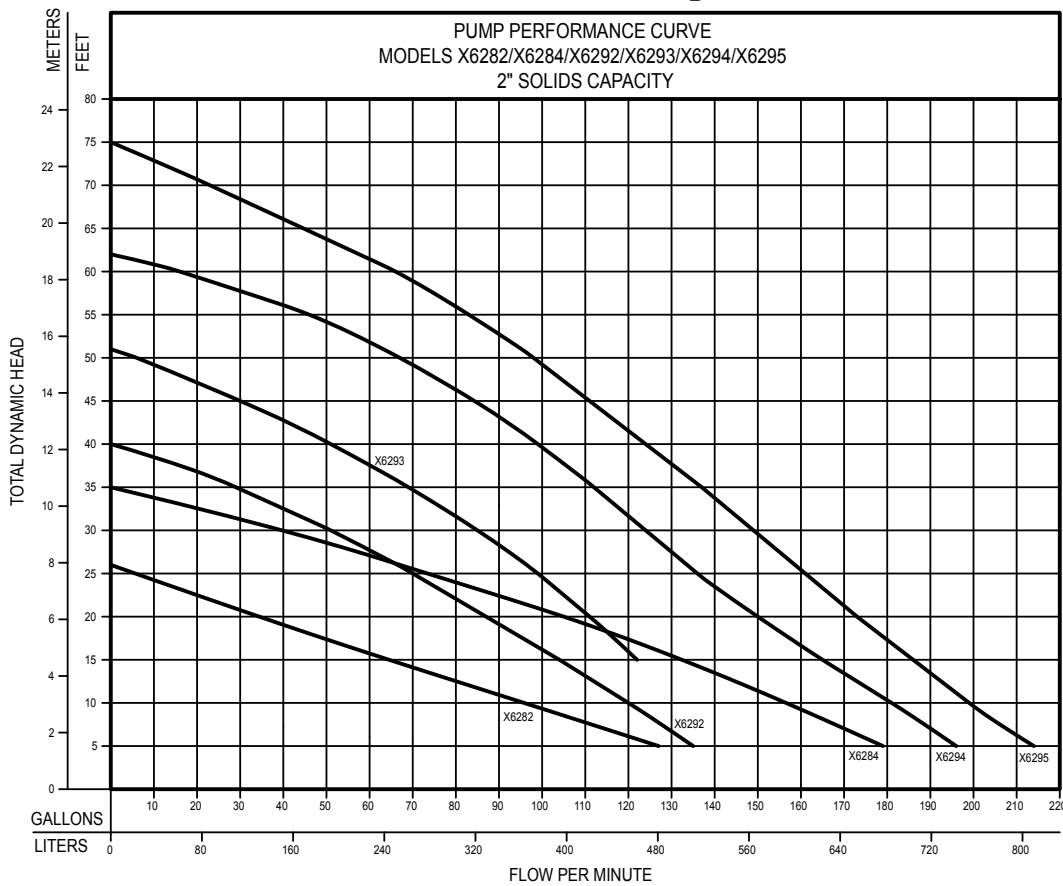

MODEL		X6282		X6284		X6292		X6293		X6294		X6295	
Feet	Meters	Gal.	Liters	Gal.	Liters	Gal.	Liters	Gal.	Liters	Gal.	Liters	Gal.	Liters
5	1.5	127	481	179	678	135	511	--	--	196	742	214	810
10	3.0	96	363	157	594	120	454	--	--	181	685	199	753
15	4.6	64	242	133	503	104	394	122	462	165	625	186	704
20	6.1	34	129	106	401	87	329	111	420	150	568	173	655
25	7.6	--	--	73	276	70	265	99	375	136	515	161	609
30	9.1	--	--	42	159	51	193	85	322	124	474	149	564
35	10.7	--	--	--	--	29	110	69	261	112	424	137	519
40	12.2	--	--	--	--	--	--	51	193	99	375	124	469
50	15.2	--	--	--	--	--	--	6	23	67	254	98	371
55	16.8	--	--	--	--	--	--	--	--	46	174	83	314
60	18.3	--	--	--	--	--	--	--	--	16	61	66	250
70	21.3	--	--	--	--	--	--	--	--	--	23	87	
Shut-off Head		26 ft.(7.9m)		35 ft.(10.7m)		40 ft.(12.2m)		51 ft.(15.5m)		62 ft.(18.9m)		75 ft.(22.9m)	

010739

SWPA Data Categories Presented -- Data on this sheet supply design information as the minimum recommended by the Submersible Waste-water Pump Association and is defined in accordance with SWPA's Standardized Definitions for Pump and Motor Characteristics. The accuracy of the data is the responsibility of Zoeller Engineered Products.

# HAZARDOUS LOCATION SERIES

CLASS I, DIVISION 1, GROUPS C & D


CLASS I, ZONE 1, GROUPS IIA & IIB

PERFORMANCE DATA

*Commercial Duty Sewage*

*3" (76 mm) Spherical Solid Passing Capacity*

*4" Flanged Horizontal Discharge*

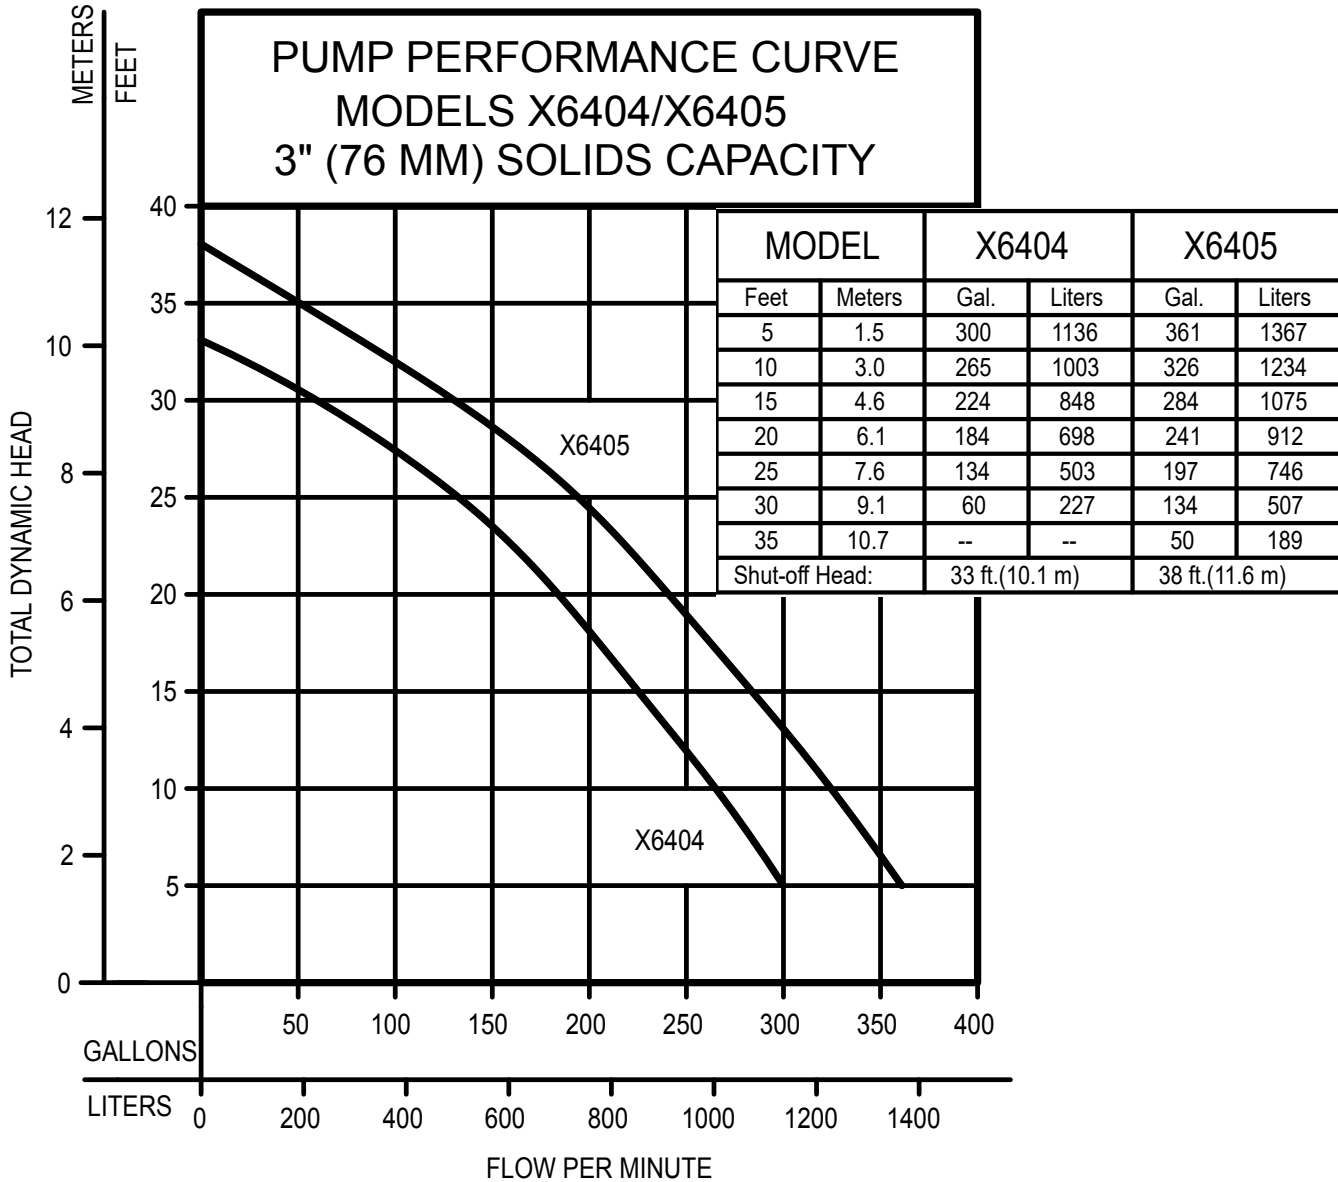

012116

SWPA Data Categories Presented -- Data on this sheet supply design information as the minimum recommended by the Submersible Wastewater Pump Association and is defined in accordance with SWPA's Standardized Definitions for Pump and Motor Characteristics. The accuracy of the data is the responsibility of Zoeller Engineered Products.